


## PRG20418 Premium wax

PRG20418 is a high quality resin enhanced wax ribbon designed to print onto wide variety of substrates. It's a durable ribbon providing an excellent print quality at low energy levels. It is extremely versatile and produces a crisp black image.

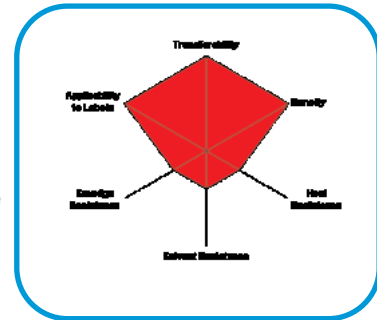

### Technical Specifications

#### Ribbon Properties

<b>Ink Type</b>	<b>Wax</b>
<b>Ribbon Thickness</b>	<b>7.7µm</b>
<b>Base Film Material</b>	<b>Polyester</b>
<b>Base Film Thickness</b>	<b>4.5µm</b>
<b>Ink Colour</b>	<b>Black</b>
<b>Transmission Density</b>	<b>More than 1.6 (Macbeth)</b>
<b>Ink Melting Point</b>	<b>77°C</b>
<b>Printing Properties</b>	
<b>Image Density</b>	<b>More than 1.9 (Macbeth)</b>
<b>Symbol Grade</b>	<b>More than ANSI 3.5, A (Parallel Bar Code)</b>
<b>Label Face Stock</b>	<b>Coated Paper, Synthetic Paper, Gloss Paper.</b>
<b>Print Speed</b>	<b>Up to 12 inch/sec</b>
<b>Usage Conditions</b>	<b>5°C to 35°C, 10% to 80% Relative Humidity</b>

### APPLICATIONS

Shipping Labels, Inventory labels, Pharmaceutical labels, Retail Tags, Tickets, Storage Labels, Warning Labels, General ticketing

### RECOMMENDED SUBSTRATES

Coated Paper, Plain Paper, Synthetic Paper, Tag

### BEST STORAGE CONDITION

Keep out of direct sunlight

Temperature -5°C - 40°C

Humidity 20%-85%RH

12 months from date of manufacture

This ribbon is manufactured in accordance with ISO 9001:2000 European Quality Standard

We guarantee that the mentioned products are in compliance with the following EC directive.

1. EN 2002/95/EC: Directive on the restriction of the use of certain hazardous substances in electrical and electronic equipment (RoHS)
2. EN 2002/96/EC: Directive on waste electrical and electronic equipment (WEEE)

**TYPE**

**RITE 08**

**LIMITED**