


PRG40818 WAX/RESIN

PRG40818 is a wax/resin ribbon providing a sharp print quality at low energy print levels. It gives excellent print quality on glossy, semi gloss papers and mirror coated papers. It offers higher smudge and scratch resistance

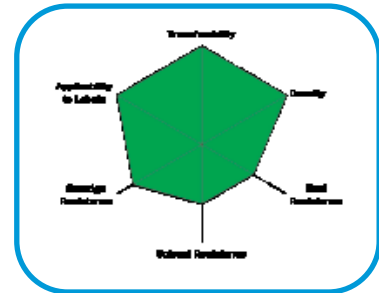

Technical Specifications

Ribbon Properties	
Ink Type	Wax/Resin
Ribbon Thickness	8.1 µm
Base Film Material	Polyester
Base Film Thickness	4.5µm
Ink Colour	Black
Transmission Density	More than 1.5 (Macbeth)
Ink Melting Point	80°C
Printing Properties	
Image Density	More than 2.1 (Macbeth)
Symbol Grade	More than ANSI 3.5, A (Parallel Bar Code)
Label Face Stock	Uncoated Paper, Coated Paper, Synthetic Paper, Gloss Paper, PET.
Print Speed	Up to 8 inch/sec
Usage Conditions	5°C to 35°C, 10% to 80% Relative Humidity

Key Characteristics

- High resolution
- Good level of smudge resistance, excellent durability
- High image density
- Long printhead life due to silicon backed ribbons
- Competitively priced
- Minimum order – one run

RECOMMENDED SUBSTRATES

Coated paper, semi gloss and glossy paper, PE, Poly-bags, synthetic paper, Various types of film, tags

APPLICATIONS

Shipping Labels, Inventory labels, Pharmaceutical labels, Retail Tags, Tickets, Storage Labels, Warning Labels, General ticketing

BEST STORAGE CONDITION

Keep out of direct sunlight
Temperature -5°C - 40°C
Humidity 20%-85%RH
12 months from date of manufacture

This ribbon is manufactured in accordance with ISO 9001:2000 European Quality Standard

We guarantee that the mentioned products are in compliance with the following EC directive.

1. EN 2002/95/EC: Directive on the restriction of the use of certain hazardous substances in electrical and electronic equipment (RoHS)
2. EN 2002/96/EC: Directive on waste electrical and electronic equipment (WEEE)

TYPE

RITE 08

LIMITED